

EN 60950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

TEST REPORT

EN 60950

Safety of information technology equipment including electrical business equipment

Report reference No.:	ASH03061001
Compiled by (+ signature) :	Fenix Yang _____
Approved by (+ signature) :	Leon Tien _____
Date of issue:	July 07, 2003 _____
Testing laboratory:	QuieTek Corporation .
Address:	3135 Kashiwa Street Torrance, CA 90505, USA
Testing location:	as above
Applicant:	TRENDware International Inc.
Address:	18F-1, No. 79, Sec. 1, Hsin Taiwu Road, Hsichih, Taipei, Taiwan.
Standard:	IEC 60950:1999, EN 60950:2000
Test procedure:	Standard
Type of test object:	1-Port USB Print Server
Trademark:	TRENDware, TRENDnet
Model / type reference:	TEW-PS1U
Manufacturer:	Same as applicant
Address:	
Factory:	
Address:	
Rating:	+5Vdc

Other Aspects:

The completed test report – includes the following documents: (total page 38)

Test results given in this report only relate to the specimen(s) tested, calibrated or measured.
This report shall not be reproduced other than in full without the written consent of Quietek.

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

Test item particulars:

Equipment mobility: Transportable.
 Operating condition: continuous
 Tested for IT power systems.....: No mains connection
 IT testing, phase-phase voltage(v).....: N.A.
 Class of equipment.....: Class III
 Mass of equipment (kg).....: Approx. 45g
 Protection against ingress of water.....: IPX0

Possible test case verdicts:

- test case does not apply to the object.....: N(A.)
 - test object does meet the requirement.....: P(ass)
 - test object does not meet the requirement.....: F(ail)

General remarks:

“(see remark #)” refers to a remark appended to the report.
 “(see appended table)” refers to a table appended to the report.
 Throughout this report a point is used as the decimal separator.
 The test results presented in this report relate only to the object tested
 This report shall not be reproduced except in full without the written approval of the testing laboratory.

Comments:
Brief description of the test sample:

The equipment’s power source from AC adaptor (L.P.S.)

Top enclosure - overall 90 by 80 by 40 mm, secured together by tube..
 The devices are for continuous operation.
 The ambient temperature for 40°C.

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

Test item particulars:

Equipment mobility: Transportable.
 Operating condition: continuous
 Tested for IT power systems.....: No mains connection
 IT testing, phase-phase voltage(v).....: N.A.
 Class of equipment.....: Class III
 Mass of equipment (kg).....: Approx. 45g
 Protection against ingress of water.....: IPX0

Possible test case verdicts:

- test case does not apply to the object.....: N(A.)
 - test object does meet the requirement.....: P(ass)
 - test object does not meet the requirement.....: F(ail)

General remarks:

“(see remark #)” refers to a remark appended to the report.
 “(see appended table)” refers to a table appended to the report.
 Throughout this report a point is used as the decimal separator.
 The test results presented in this report relate only to the object tested
 This report shall not be reproduced except in full without the written approval of the testing laboratory.

Comments:
Brief description of the test sample:

The equipment’s power source from AC adaptor (L.P.S.)

Top enclosure - overall 90 by 80 by 40 mm, secured together by tube..
 The devices are for continuous operation.
 The ambient temperature for 40°C.

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

TRENDnet

Wireless 1-Port Print Server (USB)

Model: TEW-PS1U

Rating: 5Vdc



1	GENERAL	P
---	---------	----------

1.5	Components		P
1.5.1	Comply with IEC 60950 or relevant component standard	Components, which were found to affect safety aspects, comply with the requirements of this standard or within the safety aspects of the relevant IEC component standards (see appended table 1.5.1).	P
1.5.2	Evaluation and testing of components	Components, which are certified to IEC and/or national standards, are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment.	P
	Dimensions (mm) of mains plug for direct plug-in :	Not direct plug-in type.	N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
4	Torque and pull test of mains plug for direct plug-in; torque (Nm); pull (N)	dto.	N
1.5.3	Thermal controls	No thermal control.	N
1.5.4	Transformers	No transformer.	N
1.5.5	Interconnecting cables	Interconnection cable for signal connected to PC is carrying only SELV on an energy level below 240VA. → Except for the insulation material there are no further requirements to the interconnection cable.	P
1.5.6	Capacitors in primary circuits	Class III equipment.	N
1.5.7	Double or reinforced insulation bridged by components		N
1.5.7.1	Bridging capacitors		N
1.5.7.2	Bridging resistors		N
1.5.7.3	Accessible parts		N
1.5.8	Components in equipment for IT power systems	Class III equipment.	N

1.6	Power interface		P
1.6.1	AC power distribution systems	Class III equipment.	N
1.6.2	Input current	Normal load according to 1.2.2.1 for this equipment is movement of mouse. (see appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment	Class III equipment.	N
1.6.4	Neutral conductor	Class III equipment.	N

1.7	Marking and instructions		P
1.7.1	Power rating	See below.	P
	Rated voltage(s) or voltage range(s) (V)	DC 5V	P

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
	Symbol for nature of supply for d.c. :		P
	Rated frequency or frequency range (Hz) :	No direct connection to the AC mains supply.	N
	Rated current (mA or A)	Not shown	P
	Manufacturer's name/Trademark	TRENDware	P
	Type/model	1) TEW-PS1U	P
	Symbol of Class II	Class III equipment.	N
	Other symbols	Additional symbols or markings do not give rise to misunderstanding.	P
	Certification marks		N
1.7.2	Safety instructions		N
1.7.3	Short duty cycles	Equipment is designed for continuous operation.	N
1.7.4	Supply voltage adjustment	No voltage/frequency setting.	N
1.7.5	Power outlets on the equipment	No outlet.	N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
1.7.6	Fuse identification	No fuse.	N
1.7.7	Wiring terminals	See below.	N
1.7.7.1	Protective earthing and bonding terminals	Class III equipment.	N
1.7.7.2	Terminal for a.c. mains supply conductors	Class III equipment.	N
1.7.8	Controls and indicators	No safety relevant switch or control.	—
1.7.8.1	Identification, location and marking		N
1.7.8.2	Colours		N
1.7.8.3	Symbols according to IEC 60417		N
1.7.8.4	Markings using figures	No indicators.	N
1.7.9	Isolation of multiple power sources	Class III equipment.	N
1.7.10	IT power system	Class III equipment.	N
1.7.11	Thermostats and other regulating devices	No thermostat or other regulating device.	N
1.7.12	Language	Marking and user's manual in English. Version of other language will be provided when national approval.	P
1.7.13	Durability	The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15s and then again for 15s with the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling nor lifting of the label edge.	P
1.7.14	Removable parts	No required markings placed on removable parts.	N
1.7.15	Replaceable batteries		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
	Language		—
1.7.16	Operator access with a tool	Only SELV inside.	N
1.7.17	Equipment for restricted access locations	No restricted access location.	N

2	PROTECTION FROM HAZARDS	P
---	-------------------------	---

2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas	See below.	P
2.1.1.1	Access to energised parts		—
	Test by inspection		N
	Test with test finger		N
	Test with test pin		N
	Test with test probe		N
2.1.1.2	Battery compartments		N
2.1.1.3	Access to ELV wiring		N
	Working voltage (V); distance (mm) through insulation		—
2.1.1.4	Access to hazardous voltage circuit wiring		N
2.1.1.5	Energy hazards	No energy hazard in operator access area. The connectors on the backside of the equipment below 240VA.	P
2.1.1.6	Manual controls	No manual controls	N
2.1.1.7	Discharge of capacitor s in the primary circuit		N
	Time-constant (s); measured voltage (V)		—
2.1.2	Protection in service access areas	No maintenance work in operation mode necessary.	N
2.1.3	Protection in restricted access locations	It is not intended to be used in restricted locations	N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
2.2	SELV circuits		P
2.2.1	General requirements	The secondary circuits were tested as SELV. See 2.2.1 to 2.2.4.	P
2.2.2	Voltages under normal conditions (V).....:	42.4V peak or 60Vd.c. are not exceeded in SELV circuit under normal operation, see appended table 2.2.2.	P
2.2.3	Voltages under fault conditions (V).....:	Single fault did not cause excessive voltage in accessible SELV circuits. Limits of 71V peak and 120Vd.c. did not exceeded within 0.2s and limits 42.4V peak and 60Vd.c. did not exceeded for longer than 0.2 s, see appended tables 2.2.2 and 5.3.	P
2.2.3.1	Separation by double or reinforced insulation (method 1)	Class III equipment.	N
2.2.3.2	Separation by earthed screen (method 2)	dto	N
2.2.3.3	Protection by earthing of the SELV circuit (method 3)	dto	N
2.2.4	Connection of SELV circuits to other circuits	Only SELV circuit provided.	N

2.3	TNV circuits <i>No TNV circuit.</i>		N
2.3.1	Limits		N
	Type of TNV circuits		—
2.3.2	Separation from other circuits and from accessible parts		N
	Used insulation.....:		—
2.3.3	Separation from hazardous voltages		N
	Used insulation.....:		—

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
2.3.4	Connection of TNV circuits to other circuits		N
	Used insulation.....:		—
2.3.5	Test for operating voltages generated externally		N
2.4	Limited current circuits		N
2.4.1	General requirements		N
2.4.2	Limit values		N
	Frequency (Hz)		—
	Measured current (mA)..... :		—
	Measured voltage (V)		—
	Measured capacitance (μF)		—
2.4.3	Connection of limited current circuits to other circuits		N
2.5	Limited power sources		N
	Inherently limited output		N
	Impedance limited output		N
	Overcurrent protective device limited output		N
	Regulating network limited output under normal operating and single fault condition		N
	Regulating network limited output under normal operating conditions and overcurrent protective device limited output under single fault condition		N
	Output voltage (V), output current (A), apparent power (VA)		—
	Current rating of overcurrent protective device (A)		—
2.6	Provisions for earthing and bonding <i>Class III equipment.</i>		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
2.6.1	Protective earthing		N
2.6.2	Functional earthing		N
2.6.3	Protective earthing and protective bonding conductors		N
2.6.3.1	Size of protective earthing conductors		N
	Rated current (A), cross-sectional area (mm ²), AWG		—
2.6.3.2	Size of protective bonding conductors		N
	Rated current (A), cross-sectional area (mm ²), AWG		—
2.6.3.3	Rated current (A), type and nominal thread diameter (mm)		N
	Resistance (Ω) of earthing conductors and their terminations, test current (A)		N
2.6.3.4	Colour of insulation.....		N
2.6.4	Terminals		N
2.6.4.1	Protective earthing and bonding terminals		N
	Rated current (A), type and nominal thread diameter (mm)		—
2.6.4.2	Separation of the protective earthing conductor from protective bonding conductors		N
2.6.5	Integrity of protective earthing		N
2.6.5.1	Interconnection of equipment		N
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N
2.6.5.3	Disconnection of protective earth		N
2.6.5.4	Parts that can be removed by an operator		N
2.6.5.5	Parts removed during servicing		N
2.6.5.6	Corrosion resistance		N
2.6.5.7	Screws for protective bonding		N
2.6.5.8	Reliance on telecommunication network		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

2.7	Overcurrent and earth fault protection in primary circuits <i>The wireless mouse is supplied by two AAA batteries and receiver supplied from a PC that is assumed to provide only SELV.</i>		N
2.7.1	Basic requirements		N
2.7.2	Faults not covered in 5.3		N
2.7.3	Short-circuit backup protection		N
2.7.4	Number and location of protective devices .. :		N
2.7.5	Protection by several devices		N
2.7.6	Warning to service personnel.....:		N

2.8	Safety interlocks <i>No safety interlock.</i>		N
2.8.1	General principles		N
2.8.2	Protection requirements		N
2.8.3	Inadvertent reactivation		N
2.8.4	Fail-safe operation		N
2.8.5	Interlocks with moving parts		N
2.8.6	Overriding an interlock		N
2.8.7	Switches and relays in interlock systems		N
2.8.7.1	Contact gaps (mm)		N
2.8.7.2	Overload test		N
2.8.7.3	Endurance test		N
2.8.7.4	Electric strength test (V)		N
2.8.8	Mechanical actuators		N

2.9	Electrical insulation <i>Only SELV inside the unit → no requirement on insulation. (See also sub clause 5.3.4)</i>		P
2.9.1	Properties of insulating materials		P

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
2.9.2	Humidity conditioning		P
2.9.3	Requirements for insulation		P
2.9.4	Insulation parameters		P
2.9.5	Categories of insulation		P
2.10	Clearances, creepage distances and distances through insulation <i>See also sub clause 5.3.4.</i>		N
2.10.1	General		N
2.10.2	Determination of working voltage		N
2.10.3	Clearances		N
2.10.3.1	General		N
2.10.3.2	Clearances in primary circuit		N
2.10.3.3	Clearances in secondary circuits		N
2.10.3.4	Measurement of transient levels		N
2.10.4	Creepage distances		N
	CTI tests		—
2.10.5	Solid insulation		N
2.10.5.1	Minimum distance through insulation		N
2.10.5.2	Thin sheet material		N
	Number of layers (pcs)..... :		—
	Electric strength test		—
2.10.5.3	Printed boards	Not applied for.	N
2.10.5.4	Wound components..... :		N
2.10.6	Coated printed boards	No coated printed boards.	N
2.10.6.1	General		N
2.10.6.2	Sample preparation and preliminary inspection		N
2.10.6.3	Thermal cycling		N
2.10.6.4	Thermal ageing		N
2.10.6.5	Electric strength test		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
2.10.6.6	Abrasion resistance test..... :		N
	Electric strength test		N
2.10.7	Enclosed and sealed parts :	No hermetically sealed components.	N
2.10.8	Spacings filled by insulating compound :		N
	Electric strength test		N
2.10.9	Component external terminations		N
2.10.10	Insulation with varying dimensions	Insulation kept homogenous.	N

3	WIRING, CONNECTIONS AND SUPPLY	P
---	--------------------------------	----------

3.1	General		P
3.1.1	Current rating and overcurrent protection	All internal wires are UL recognized wiring which is PVC insulated, rated VW-1, minimum 80°C, 300V. Internal wiring gauge is suitable for current intended to be carried. No internal wire for primary power distribution.	P
3.1.2	Protection against mechanical damage	Wires do not touch sharp edges, which could damage the insulation and cause hazard.	P
3.1.3	Securing of internal wiring	Internal wires are routed. The wires are secured by solder pins and quick connect terminals so that a loosening of the terminal connection is unlikely.	P
3.1.4	Insulation of conductors		N
3.1.5	Beads and ceramic insulators		N
3.1.6	Screws for electrical contact pressure		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
3.1.7	Non-metallic materials in electrical connections		N
3.1.8	Self-tapping and spaced thread screws		N
3.1.9	Termination of conductors		N
3.1.10	Sleeving on wiring		N

3.2	Connection to a.c. mains supplies <i>Class III equipment.</i>		N
3.2.1	Means of connection		N
3.2.2	Multiple supply connections		N
3.2.3	Permanently connected equipment		N
	Number of conductors, diameter (mm) of cable and conduits		—
3.2.4	Appliance inlets		N
3.2.5	Power supply cords		N
	Type.....		—
	Rated current (A), cross-sectional area (mm ²), AWG		—
3.2.6	Cord anchorages and strain relief		N
	Mass of equipment (kg), pull (N)		—
	Longitudinal displacement (mm)		—
3.2.7	Protection against mechanical damage		N
3.2.8	Cord guards		N
	D (mm); test mass (g)		—
	Radius of curvature of cord (mm)		—
3.2.9	Supply wiring space		N

3.3	Wiring terminals for connection of external conductors <i>Class III equipment.</i>		N
3.3.1	Wiring terminals		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
3.3.2	Connection of non-detachable power supply cords		N
3.3.3	Screw terminals		N
3.3.4	Rated current (A), cord/cable type, cross-sectional area (mm ²)		N
3.3.5	Rated current (A), type and nominal thread diameter (mm)		N
3.3.6	Wiring terminals design		N
3.3.7	Grouping of wiring terminals		N
3.3.8	Standard wire		N

3.4	Disconnection from the a.c. mains supply <i>Class III equipment.</i>		N
3.4.1	General requirement		N
3.4.2	Disconnect devices		N
3.4.3	Permanently connected equipment		N
3.4.4	Parts which remain energized		N
3.4.5	Switches in flexible cords		N
3.4.6	Single-phase equipment		N
3.4.7	Three-phase equipment		N
3.4.8	Switches as disconnect devices		N
3.4.9	Plugs as disconnect devices		N
3.4.10	Interconnected equipment		N
3.4.11	Multiple power sources		N

3.5	Interconnection of equipment		P
3.5.1	General requirements	See below.	P
3.5.2	Types of interconnection circuits	Interconnection circuits of SELV through the connectors. No ELV interconnection circuits.	P

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

3.5.3	ELV circuits as interconnection circuits	No ELV interconnection	N
-------	--	------------------------	---

4	PHYSICAL REQUIREMENTS		P
4.1	Stability		N
	Angle of 10°	This appliance is of a stable mechanical construction and does not overbalance when tilted to an angle of 10° from its normal upright position.	P
	Test: force (N)	Equipment is not a floorstanding unit.	N

4.2	Mechanical strength <i>As there are no hazardous voltages present in the unit or other hazards foreseeable, the tests of these clauses were not performed but replaced by a construction review only.</i>		P
4.2.1	General		N
4.2.2	Steady force test, 10 N		N
4.2.3	Steady force test, 30 N		N
4.2.4	Steady force test, 250 N		N
4.2.5	Impact test		N
4.2.6	Drop test		N
4.2.7	Stress relief		N
4.2.8	Cathode ray tubes		—
	Picture tube separately certified.....		N
	Picture tubes > 16 cm intrinsically protected		N
	Non-intrinsically protected tubes > 16cm used with protective screen		N
	Intrinsically protected tubes: tests on 12 samples		N
	Samples subject to ageing: 6		N
	Samples subject to implosion test: 6		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
	Samples subject to mechanical strength test (steel ball): 6		N
	Non-intrinsically protected tubes tested		N
4.2.9	High pressure lamps		N
4.2.10	Wall or ceiling mounted equipment; force (N)		N

4.3	Design and construction		P
4.3.1	Edges and corners	Edges and corners of the enclosure are rounded.	P
4.3.2	Handles and manual controls; force (N)		N
4.3.3	Adjustable controls	None that would cause hazard.	N
4.3.4	Securing of parts	Electrical and mechanical connections can be expected to with standard usual mechanical stress. For the protection solder pins are used.	P
4.3.5	Connection of plugs and sockets		N
4.3.6	Direct plug-in equipment	Not direct plug-in type.	N
	Torque (Nm)		—
4.3.7	Heating elements in earthed equipment	Class III equipment.	N
4.3.8	Batteries	The wireless mouse supplied by two AAA non-rechargeable carbon-zinc or alkaline batteries only.	N
4.3.9	Oil and grease	No oil or grease.	N
4.3.10	Dust, powders, liquids and gases	Equipment in intended use not considered to be exposed to these.	P
4.3.11	Containers for liquids or gases	No container for liquid or gas.	N
4.3.12	Flammable liquids.....	No flammable liquid.	N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
	Quantity of liquid (l)		N
	Flash point (°C)		N
4.3.13	Radiation; type of radiation		N
	Equipment using lasers, see separate test report of IEC 60825-1.		N
4.4	Protection against hazardous moving parts <i>No hazardous moving part.</i>		N
4.4.1	General		N
4.4.2	Protection in operator access areas		N
4.4.3	Protection in restricted access locations		N
4.4.4	Protection in service access areas		N
4.5	Thermal requirements <i>The mouse and receiver have no significant temperature rise on critical components as the input power is <1W only, therefore no temperature rise test was done.</i>		P
4.5.1	Temperature rises	(see appended table)	P
4.5.2	Resistance to abnormal heat		N
4.6	Openings in enclosures		N
4.6.1	Top and side openings	No electrical enclosure required.	N
	Dimensions (mm)		—
4.6.2	Bottoms of fire enclosures	There is no openings at bottom of enclosure.	P
	Construction of the bottom	(see appended table)	—

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
4.6.3	Doors or covers in fire enclosures	The fire enclosure contains an operator removal cover which intended only for occasional use (installing battery). There are instructions provided for correct removal and installation within the user's manual.	P
4.6.4	Openings in transportable equipment	Equipment is not transportable equipment.	N
4.6.5	Adhesives for constructional purposes		N

4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame	Use of materials with the required flammability classes.	P
4.7.2	Conditions for a fire enclosure	See 4.7.2.1.	P
4.7.2.1	Parts requiring a fire enclosure	<p>With having the following components:</p> <ul style="list-style-type: none"> ■ components in secondary (not supplied by LPS) ■ insulated wiring <p>the fire enclosure is required. However, according to decisions by operating staff meeting (documents OSM/EE (Chairman)9/99, the enclosure of keyboard or similar devices can be accepted to be made of material class HB min. based on abnormal test. There is no fire hazard after 5.3. Enclosure material rated flammability class HB material is acceptable here.</p>	P

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
4.7.2.2	Parts not requiring a fire enclosure	See 4.7.2.1.	N
4.7.3	Materials	See below.	P
4.7.3.1	General	PCB rated V-1 or better.	P
4.7.3.2	Materials for fire enclosures	See 4.7.2.1.	N
4.7.3.3	Materials for components and other parts outside fire enclosures	dto	N
4.7.3.4	Materials for components and other parts inside fire enclosures	Internal components except small parts are V-2, HF-2 or better.	P
4.7.3.5	Materials for air filter assemblies	No air filter assemblies.	N
4.7.3.6	Materials used in high-voltage components	No high voltage component.	N

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS	P
---	---	----------

5.1	Touch current and protective conductor current <i>Class III equipment without TNV circuit.</i>	N
5.1.1	General	N
5.1.2	Equipment under test (EUT)	N
5.1.3	Test circuit	N
5.1.4	Application of measuring instrument	N
5.1.5	Test procedure	N
5.1.6	Test measurements	N
	Test voltage (V)	—
	Measured current (mA)	—
	Max. allowed current (mA)	—
5.1.7	Equipment with touch current exceeding 3.5 A	N
5.1.8	Touch currents to and from telecommunication networks	N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
5.1.8.1	Limitation of the touch current to a telecommunication network		N
	Test voltage (V)		—
	Measured current (mA)		—
	Max. allowed current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks		N

5.2	Electric strength <i>Class III equipment.</i>		N
5.2.1	General		N
5.2.2	Test procedure		N

5.3	Abnormal operating and fault conditions		N
5.3.1	Protection against overload and abnormal operation		N
5.3.2	Motors	No motor.	N
5.3.3	Transformers	No isolating transformer used.	N
5.3.4	Functional insulation.....		N
5.3.5	Electromechanical components	No electromechanical component.	N
5.3.6	Simulation of faults	No other abnormal tests necessary.	N
5.3.7	Unattended equipment	Equipment was not intended for unattended use.	N
5.3.8	Compliance criteria for abnormal operating and fault conditions		N
5.3.8.1	During the tests		N
5.3.8.2	After the tests	Considered.	N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
6	CONNECTION TO TELECOMMUNICATION NETWORKS <i>No TNV.</i>		N
6.1	Protection of telecommunication network service personnel, and users of other equipment connected to the network, from hazards in the equipment		N
6.1.1	Protection from hazardous voltages		N
6.1.2	Separation of the telecommunication network from earth		N
6.1.2.1	Requirements		N
	Test voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions		N
6.2	Protection of equipment users from overvoltages on telecommunication networks		N
6.2.1	Separation requirements		N
6.2.2	Electric strength test procedure		N
6.2.2.1	Impulse test		N
6.2.2.2	Steady-state test		N
6.2.2.3	Compliance criteria		N
6.3	Protection of telecommunication wiring system from overheating		N
	Max. output current (A)		—
	Current limiting method.....		—
A	ANNEX , TESTS FOR RESISTANCE TO HEAT AND FIRE		N
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 g, and of stationary equipment (see 4.7.3.2)		N
A.1.1	Samples		N
	Wall thickness (mm)		—
A.1.2	Conditioning of samples; temperature (°C) . :		N
A.1.3	Mounting of samples.....		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
A.1.4	Test flame		N
A.1.5	Test procedure		N
A.1.6	Compliance criteria		N
	Sample 1 burning time (s)..... :		—
	Sample 2 burning time (s)..... :		—
	Sample 3 burning time (s)..... :		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N
A.2.1	Samples		N
	Wall thickness (mm) :		—
A.2.2	Conditioning of samples; temperature (°C) . :		N
A.2.3	Mounting of samples..... :		N
A.2.4	Test flame		N
A.2.5	Test procedure		N
A.2.6	Compliance criteria		N
	Sample 1 burning time (s)..... :		—
	Sample 2 burning time (s)..... :		—
	Sample 3 burning time (s)..... :		—
A.2.7	Alternative test acc. to IEC 60695-2-2, cl. 4, 8		N
	Sample 1 burning time (s)..... :		—
	Sample 2 burning time (s)..... :		—
	Sample 3 burning time (s)..... :		—
A.3	High current arcing ignition test (see 4.7.3.2)		N
A.3.1	Samples		N
	Wall thickness (mm) :		—
A.3.2	Test circuit		N
A.3.3	Test electrodes		N
A.3.4	Test procedure		N

EN 60 950			
Clause	Requirement - Test	Result -remark	Verdict
A.3.5	Compliance criteria		N
	Sample 1 number of arcs to ignition (pcs) ... :		—
	Sample 2 number of arcs to ignition (pcs) ... :		—
	Sample 3 number of arcs to ignition (pcs) :		—
	Sample 4 number of arcs to ignition (pcs) :		—
	Sample 5 number of arcs to ignition (pcs) ... :		—
A.4	Hot wire ignition test (see 4.7.3.2)		N
A.4.1	Samples		N
	Wall thickness (mm) :		—
A.4.2	Test circuit		N
A.4.3	Mounting of samples..... :		N
A.4.4	Test procedure		N
A.4.5	Compliance criteria		N
	Sample 1 ignition time (s)..... :		—
	Sample 2 ignition time (s)..... :		—
	Sample 3 ignition time (s)..... :		—
	Sample 4 ignition time (s)..... :		—
	Sample 5 ignition time (s)..... :		—
A.5	Hot flaming oil test (see 4.6.2)		N
A.5.1	Mounting of samples..... :		N
A.5.2	Test procedure		N
A.5.3	Compliance criterion..... :		N
A.6	Flammability tests for classifying materials V-0, V-1 or V-2		N
A.6.1	Samples		N
	Wall thickness (mm) :		—
A.6.2	Conditioning of samples temperature (°C)... :		N
A.6.3	Mounting of samples..... :		N
A.6.4	Test procedure		N
A.6.5	Compliance criteria		N

EN 60 950			
Clause	Requirement - Test	Result -remark	Verdict
A.6.6	Permitted retest		N
A.7	Flammability test for classifying foamed materials HF-1, HF-2 or HFB		N
A.7.1	Sample		N
	Wall thickness (mm) :		—
A.7.2	Conditioning of samples; temperature (°C) . :		N
A.7.3	Test procedure		N
A.7.4	Compliance criteria		N
A.7.5	Compliance criteria, HF-2		N
A.7.6	Compliance criteria, HF-1		N
A.7.7	Compliance criteria, HBF		N
A.7.8	Permitted retest, HF-1 or HF-2		N
A.7.9	Permitted retest, HBF		N
A.8	Flammability test for classifying materials HB		N
A.8.1	Samples		N
	Sample thickness (mm) :		—
A.8.2	Conditioning of samples; temperature (°C) . :		N
A.8.3	Mounting of samples..... :		N
A.8.4	Test procedure		N
A.8.5	Compliance criteria		N
A.8.6	Permitted retest		N
A.9	Flammability test for classifying materials 5V		N
A.9.1	Samples		N
	Sample thickness (mm) :		—
A.9.2	Conditioning of samples temperature (°C)... :		N
A.9.3	Test flame		N
A.9.4	Test procedure, test bars		N
A.9.5	Test procedure, test plaques		N
A.9.6	Compliance criteria :		N
A.9.7	Permitted retest		N

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

A.10	Stress relief conditioning (see 4.2.7)		N
	Temperature (°C).....:		—

B	ANNEX , MOTOR TESTS UNDER ABNORMAL CONDITIONS		N
B.1	General requirements		N
	Position		—
	Manufacturer		—
	Type		—
	Rated values		—
B.2	Test conditions		N
B.3	Maximum temperatures		N
B.4	Running overload test		N
B.5	Locked-rotor overload test		N
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for DC motors in secondary circuits		N
B.7	Locked-rotor overload test for DC motors in secondary circuits		N
B.7.1	Test procedure		N
B.7.2	Alternative test procedure; test time (h)		N
B.7.3	Electric strength test		N
B.8	Test for motors with capacitors		N
B.9	Test for three-phase motors		N
B.10	Test for series motors		N
	Operating voltage (V)		—

C	ANNEX , TRANSFORMERS		N
	Position		—
	Manufacturer		—
	Type		—

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
	Rated values		—
C.1	Overload test		N
C.2	Insulation		N
D	ANNEX , MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		N
D.1	Measuring instrument		N
D.2	Alternative measuring instrument		N
E	ANNEX , TEMPERATURE RISE OF A WINDING (see 1.4.13 and 4.5.1)		N
F	ANNEX , MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		N
G	ANNEX , ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N
G.1	Summary of the procedure for determining minimum clearances		N
G.2	Determination of mains transient voltage (V)		N
G.3	Determination of telecommunication network transient voltage (V)		N
G.4	Determination of required withstand voltage (V)		N
G.5	Measurement of transient levels (V)		N
G.6	Determination of minimum clearances		N
H	ANNEX , IONIZING RADIATION (see 4.3.13)		N
	Ionizing radiation		N
	Measured radiation (mR/h)		—
	Measured high-voltage (kV)		—

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
	Measured focus voltage (kV)		—
	CRT markings		—

J	ANNEX , TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		N
	Metal used		—

K	ANNEX , THERMAL CONTROLS (see 1.5.3 and 5.3.7)		N
K.1	Making and breaking capacity		N
K.2	Thermostat reliability; operating voltage (V):		N
K.3	Thermostat endurance test; operating voltage (V)		N
K.4	Temperature limiter endurance; operating voltage (V)		N
K.5	Thermal cut-out reliability		N
K.6	Stability of operation		N

L	ANNEX , NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.1)		P
L.1	Typewriters	No typewriter.	N
L.2	Adding machines and cash registers	No adding machine or cash registers.	N
L.3	Erasers	No eraser.	N
L.4	Pencil sharpeners	No pencil sharpener.	N
L.5	Duplicators and copy machines	No duplicator or copy machine.	N
L.6	Motor-operated files	No motor-operated file.	N
L.7	Other business equipment	See 1.6.2.	P

M	ANNEX , CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N
---	--	--	---

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
3			
M.1	Introduction		N
M.2	Method A		N
M.3	Method B		N
M.3.1	Ringling signal		N
M.3.1.1	Frequency (f)..... :		N
M.3.1.2	Voltage (V) :		N
M.3.1.3	Cadence; time (s), voltage (V) :		N
M.3.1.4	Single fault current (mA) :		N
M.3.2	Tripping device and monitoring voltage..... :		N
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N
M.3.2.2	Tripping device		N
M.3.2.3	Monitoring voltage (V)..... :		N

U	ANNEX , INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4).		N
	Separate test report		N

V	ANNEX , AC POWER DISTRIBUTION SYSTEMS (see 1.6.1) <i>Class III equipment.</i>		N
V.1	Introduction		N
V.2	TN power systems		N
V.3	TT power systems		N
V.4	IT power systems		N

1.5.1	TABLE: list of critical components					P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹⁾	
Enclosure Material	Various	Various	HB or better.	UL 94	UL	

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

PCB material	--	--	V-1, min., 105°C	UL 94	UL
AC adaptor	Various	Various	O/P: 5Vdc, 2.5A	EN 60950	TUV (L.P.S.)

¹⁾ an asterisk indicates a mark which assures the agreed level of surveillance

1.6.2	TABLE: electrical data (in normal conditions) Without wireless card					P
Fuse #	Irated (A)	U (V)	P (W)	I (A)	Ifuse (A)	Condition/status
F1	0.5	90V/50Hz	3.90	0.083		Maximum normal load.
F1	0.5	90V/60Hz	3.92	0.084		Maximum normal load.
F1	0.5	100V/50Hz	3.95	0.072		Maximum normal load.
F1	0.5	100V/60Hz	3.95	0.074		Maximum normal load.
F1	0.5	240V/50Hz	4.60	0.052		Maximum normal load.
F1	0.5	240V/60Hz	4.50	0.056		Maximum normal load.
F1	0.5	254V/50Hz	4.70	0.054		Maximum normal load.
F1	0.5	254V/60Hz	4.70	0.052		Maximum normal load.

1.6.2	TABLE: electrical data (in normal conditions) With wireless card					P
Fuse #	Irated (A)	U (V)	P (W)	I (A)	Ifuse (A)	Condition/status
F1	0.5	90V/50Hz	5.20	0.10		Maximum normal load.
F1	0.5	90V/60Hz	5.17	0.11		Maximum normal load.
F1	0.5	100V/50Hz	5.16	0.10		Maximum normal load.
F1	0.5	100V/60Hz	5.16	0.10		Maximum normal load.
F1	0.5	240V/50Hz	5.72	0.06		Maximum normal load.
F1	0.5	240V/60Hz	5.74	0.06		Maximum normal load.
F1	0.5	254V/50Hz	5.82	0.06		Maximum normal load.
F1	0.5	254V/60Hz	5.90	0.07		Maximum normal load.

2.1.1.5	TABLE: max. V, A, VA test					N
---------	---------------------------	--	--	--	--	---

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)

2.1.1.7	TABLE: discharge test				N
Condition	τ calculated (s)	τ measured (s)	t u→ 0V (s)	Comments	

2.2.2	TABLE: Hazardous voltage measurement				N
Transformer	Location	max. Voltage		Voltage Limitation Component	
		V peak	V d.c.		

2.2.2	TABLE: SEL voltage measurement			N
Location		Voltage measured (V)	Comments	

2.4.2	TABLE: limited current circuit measurement					N
Location	Voltage (V)	Current (mA)	Freq. (kHz)	Limit (mA)	Comments	

2.6.3.3	TABLE: ground continue test			N
Location		Resistant measured (mΩ)	Comments	

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

2.10.2	Table: working voltage measurement			N
Location	RMS voltage (V)	Peak voltage (V)	Comments	

2.10.3 and 2.10.4	TABLE: clearance and creepage distance measurements					N
Clearance cl and creepage distance dcr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required dcr (mm)	dcr (mm)

2.10.5	TABLE: distance through insulation measurements				N
Distance through insulation di at/of:	U r.m.s. (V)	Test voltage (V)	Required di (mm)	di (mm)	

4.5	TABLE: temperature rise measurements		With wireless card	
	test voltage (V)	:	90V/60Hz	—
	t1 (°C)	:	--	—
	t2 (°C)	:	--	—
Rise dT of part/at:		dT (K)		Allowed dT (K)
Wireless card				
U4				
P1				

EN 60 950

EN 60 950					
Clause	Requirement - Test		Result -remark		Verdict
C24					
Enclosure outside					
T1 coil (Adapter)					
T1 core (Adapter)					
LF coil (Adapter)					
LF core (Adapter)					
C3 (Adapter)					
Enclosure (Adapter)					
Ambient					
Temperature rise dT of winding:	R ₁ (Ω)	R ₂ (Ω)	dT (K)	allowed dT (K)	insulation class

4.5	TABLE: temperature rise measurements With wireless card		
	test voltage (V)	90V/60Hz	—
	t1 (°C)	--	—
	t2 (°C)	--	—
Rise dT of part/at:		dT (K)	Allowed dT (K)
Wireless card		38.4	
U4		54.5	
P1		30.4	
C24		32.7	
Enclosure outside		15.2	
T1 coil (Adapter)		20.1	
T1 core (Adapter)		19.1	
LF coil (Adapter)		17.6	
LF core (Adapter)		16.4	
C3 (Adapter)		20.7	
Enclosure (Adapter)		4.7	

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

Ambient	23.6	
---------	------	--

4.5.2	TABLE: ball pressure test of thermoplastic parts		N
	allowed impression diameter (mm)	≤ 2 mm	—
Part	Test temperature (°C)	Impression diameter (mm)	

4.6.1, 4.6.2	Table: enclosure openings		P
Location	Size (mm)	Comments	
Top	None		
Side	None		
Bottom	None		

5.1.6	TABLE: touch current measurement			N
Condition	L → terminal A (mA)	N → terminal A (mA)	Limit (mA)	Comments

5.2	TABLE: electric strength tests and impulse tests		N
Test voltage applied between:		Test voltage (V)	Breakdown
Supplementary information			

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict

5.3	TABLE: fault condition tests						N
	ambient temperature (°C)						—
	model/type of power supply						—
	manufacturer of power supply						—
	rated markings of power supply						—
No.	Component no.	Fault	Test voltage (V)	Test time	Fuse no.	Fuse current (A)	Result
Supplementary information							
Note: In fault column, s-c=short-circuited, o-l=over-loaded.							

A.6.5	TABLE: flammable test for classifying materials V-0, V-1 or V-2		N
Sample no./ref.	Afterflame time (s) t_1 or t_2	Afterflame + afterglow (s) after 2nd flame application $t_2 + t_3$	
1/A			
2/A			
3/A			
4/A			
5/A			
6/B			
7/B			
8/B			
9/B			
10/B			
Supplementary information:			

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

Total afterflame time (s) for any condition set $t_1 + t_2$ for five (5) specimens:

A.6.6	TABLE: flammable test for classifying materials V-0, V-1 or V-2		N
Sample no.	Afterflame time (s) t_1 or t_2	Afterflame + afterglow (s) after 2nd flame application t_2+t_3	
11			
12			
13			
14			
15			
Supplementary information:			
Total afterflame time (s) for any condition set $t_1 + t_2$ for five (5) specimens:			

A.7.4, A.7.5, A.7.6 and A.7.7	TABLE: flammability test for classifying foam materials HF-1, HF-2 or HBF			N
Sample no./ref.	Flame time (s)	Glow time (s)	Flaming/glowing distance from the end (mm)	Comment (for A.7.7 Burning rate mm/min)
1/A				
2/A				
3/A				
4/A				
5/A				
6/B				
7/B				
8/B				

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

9/B				
10/B				
Supplementary information:				

A.7.8	TABLE: flammability test for classifying foam materials HF-1 or HF-2			N
Sample no.	Flame time (s)	Glow time (s)	Flaming/glowing distance from the end (mm)	Comment
11				
12				
13				
14				
15				
supplementary information:				

A.7.9	TABLE: flammability test for classifying foam materials HBF			N
Sample no.	Flame time (s)	Glow time (s)	Flaming/glowing distance from the end (mm)	Comment (for A.7.7 Burning rate mm/min)
11				
12				
13				
14				
15				
Supplementary information:				

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

A.8.5	TABLE: flammable test for classifying materials HB		N
Sample no.	Flaming/glowing rate (mm/min)	Flaming/glowing distance from reference mark (mm)	
1			
2			
3			
Supplementary information:			

A.8.6	TABLE: flammable test for classifying materials HB		N
Sample no.	Flaming/glowing rate (mm/min)	Flaming/glowing distance from reference mark (mm)	
4			
5			
6			
Supplementary information:			

A.9.6	TABLE: flammability test for classifying materials 5V			N
Sample no./ ref.	Test bars		Test plaques	
	Flaming + glowing time (s)	Burning distance (mm)	Flaming + glowing time (s)	Burning distance (mm)
1/A				
2/A				
3/A				
4/A				
5/A			—	—

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

6/B				
7/B				
8/B				
9/B				
10/B			—	—
Supplementary information:				


A.9.7	TABLE: flammability test for classifying materials 5V				N
Sample no.	Test bars		Test plaques		
	Flaming + glowing time (s)	Burning distance (mm)	Flaming + glowing time (s)	Burning distance (mm)	
11					
12					
13					
14					
15			—	—	
Supplementary information:					

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

Photo



VIEW 1

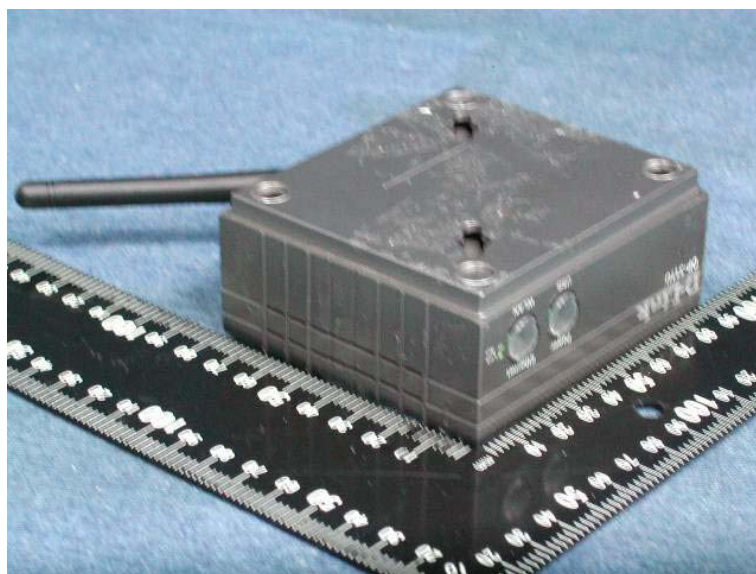

VIEW 2

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------




VIEW 3




VIEW 4

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

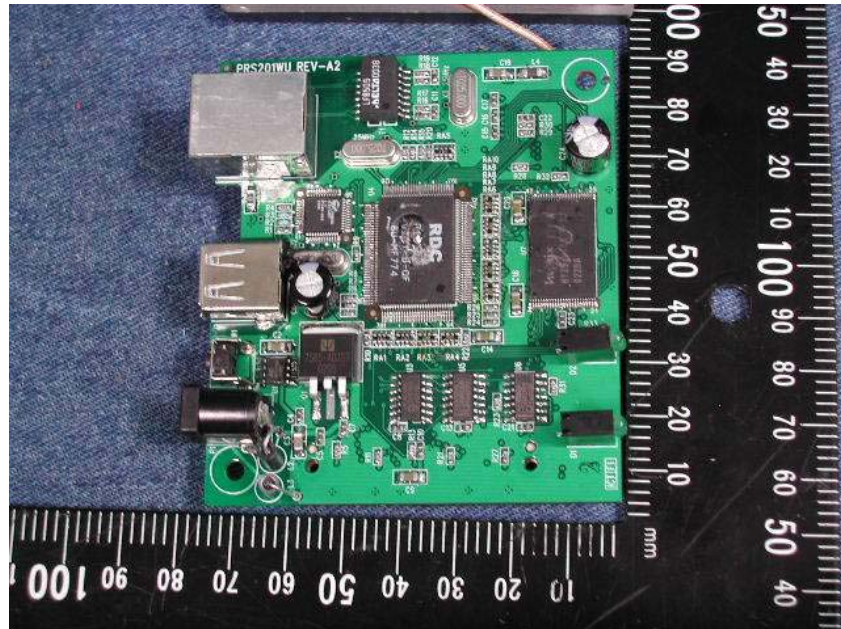


VIEW 5

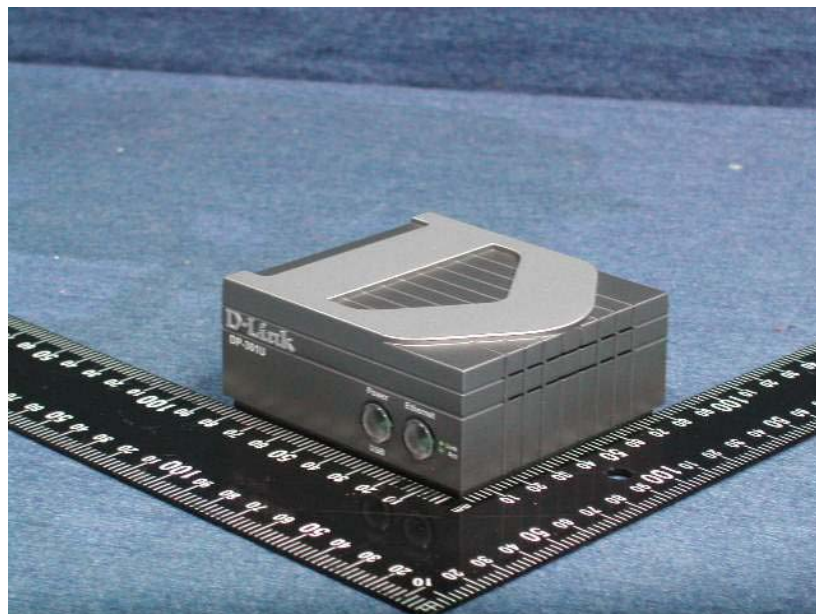


VIEW 6

EN 60 950

Clause	Requirement - Test	Result -remark	Verdict
--------	--------------------	----------------	---------

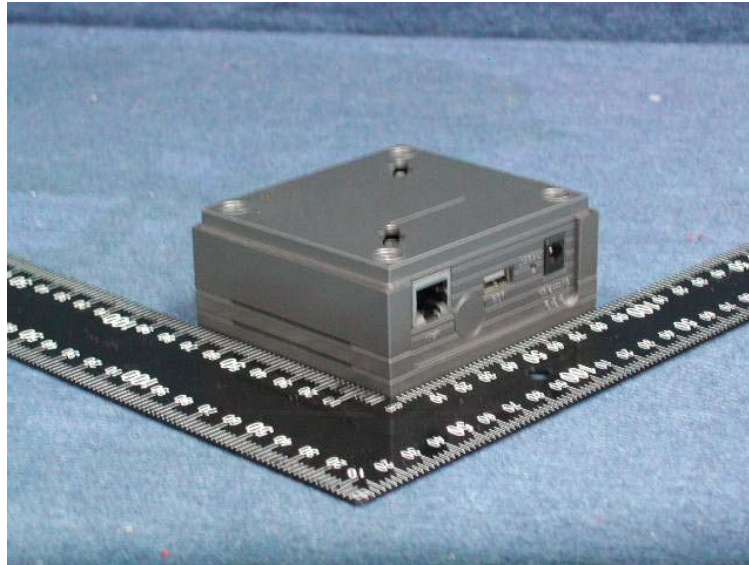


VIEW 7

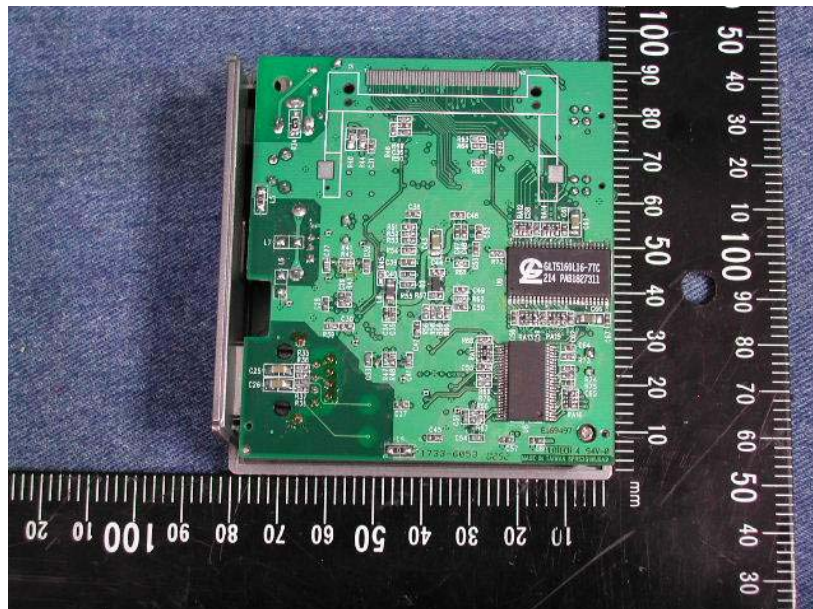


VIEW 8

EN 60 950			
Clause	Requirement - Test	Result -remark	Verdict

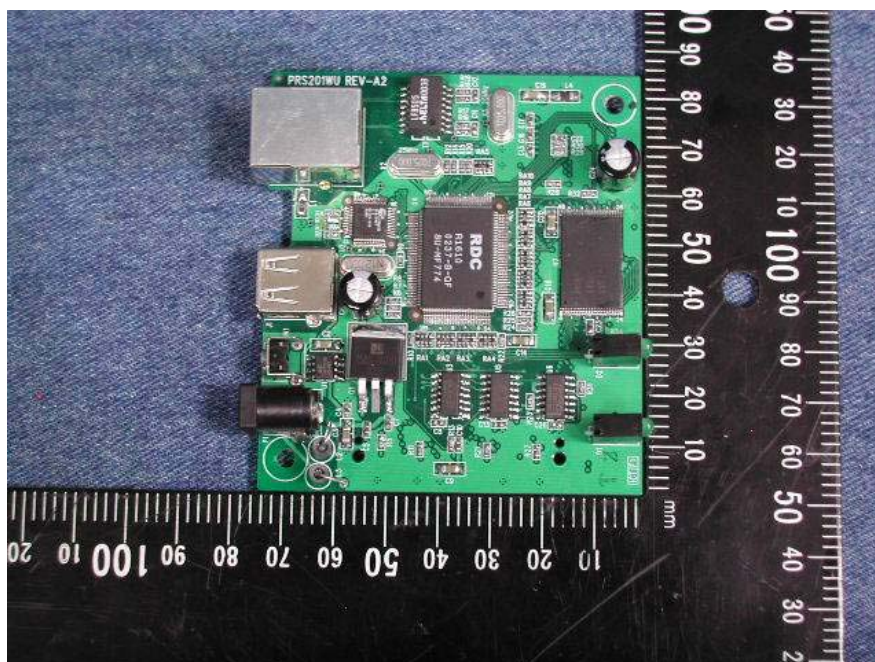

VIEW 9

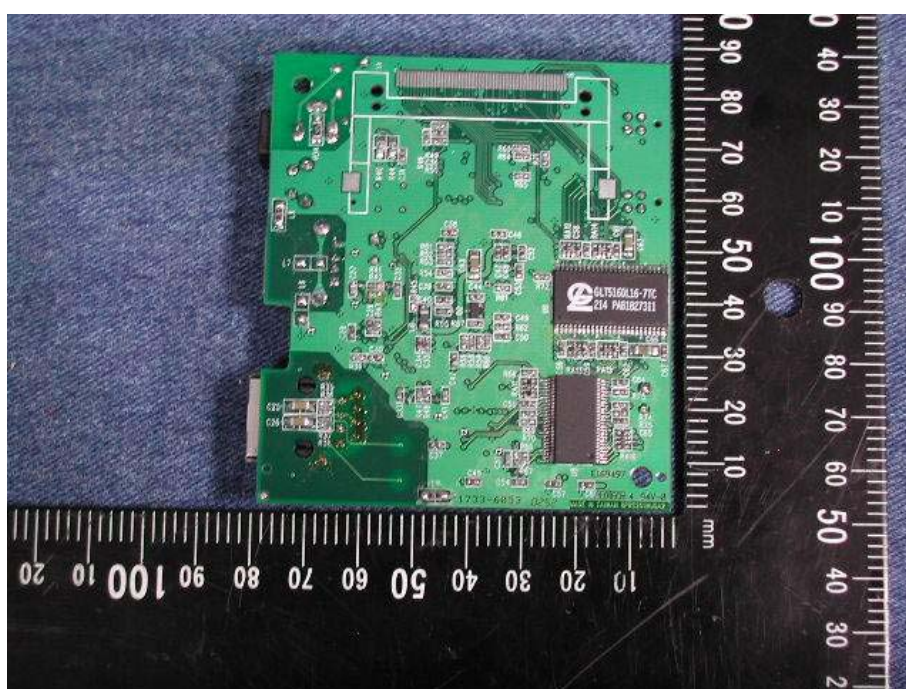

VIEW 10